



GOALTEK



www.goaltek.cn



ExMP51R

Ex-Proof Rechargeable Handlamp



90° rotational head



4 optional colors light source, switch by knob.

Usage	II Zone 1/2, III Zone 21/22
	≥410lm (strong mode), ≥210lm (work mode)
	≥14h (strong mode), ≥25h (work mode)
	Up to 164m beam distance
	-20°C≤Ta≤+55°C
	7.2V, 6700mAh, 18650 lithium battery
	≤12h
	IP66/67
	98.5 × 127 × 228.3 mm
	960 g (with battery)

Product Video





Data Sheet





ExMP52R

Ex-Proof Rechargeable Handlamp

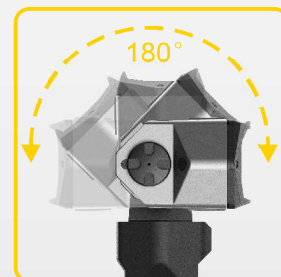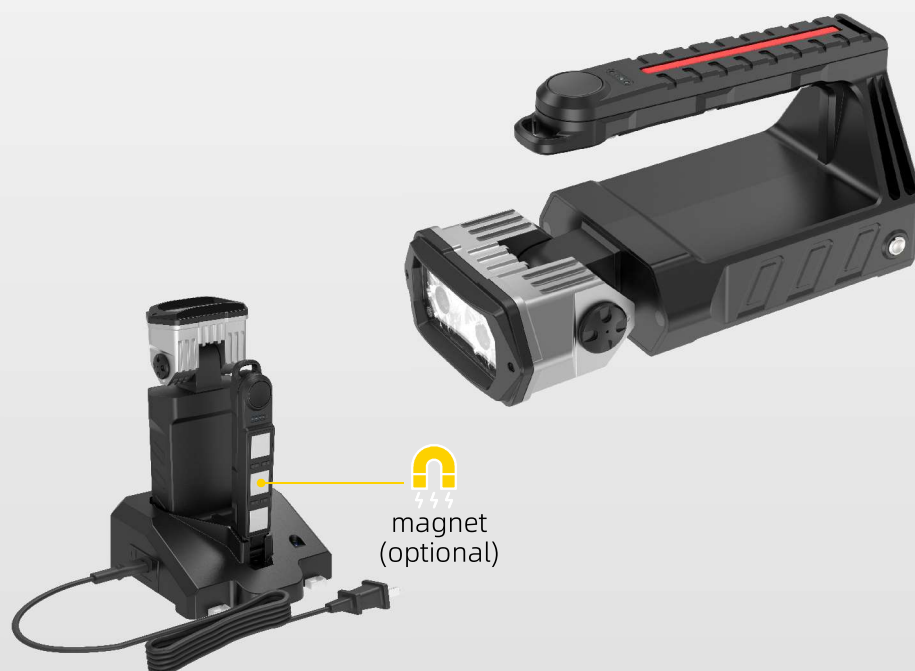

180° rotational head



Position indicator
(color is optional)



Usage	II Zone 1/2, III Zone 21/22
	≥340lm (strong mode), ≥180lm (work mode)
	≥14h (strong mode), ≥24h (work mode)
	Up to 118m beam distance
	-40°C≤Ta≤+55°C
	3.6V, 10050mAh, 18650 lithium battery
	≤12h
	IP66/67
	193.2 × 92.2 × 105 mm
	610 g (with battery)

Product Video



Data Sheet





ExMP61R-1

Ex-Proof Rechargeable Headtorch



108° rotational head



Headband accessory

Usage	I, II Zone 0/1/2, and III Zone 21/22
	≥220lm (strong mode), ≥100lm (work mode)
	≥9h (strong mode), ≥16h (work mode)
	Up to 94m beam distance
	-40°C≤Ta≤+55°C
	3.6V, 3350mAh, 18650 lithium battery
	≤5h
	IP66/67
	89.2 × 69 × 48 mm
	159 g (with battery)

Product Video



Data Sheet





ExMP61R-2

Ex-Proof Rechargeable Headtorch



108° rotational head



Headband accessory

Usage	II Zone 0/1/2, and III Zone 21/22
	≥220lm (strong mode), ≥100lm (work mode)
	≥13h (strong mode), ≥24h (work mode)
	Up to 94m beam distance
	-40°C≤Ta≤+55°C
	3.6V, 6700mAh, 18650 lithium battery
	≤9h
	IP66/67
	89.2 × 69 × 48 mm
	209 g (with battery)

Product Video




Data Sheet



ExMP32R

Ex-Proof Rechargeable Right Angle Torch



90° rotational head



4 grids power display

Usage	I, II Zone 1/2, and III Zone 21/22
	≥220lm (strong mode), ≥110lm (work mode)
	≥14h (strong mode), ≥27h (work mode)
	Up to 85m beam distance
	-40°C≤Ta≤+55°C
	3.6V, 6700mAh, 18650 lithium battery
	≤9h
	IP66/67
	132.5 × 54 × 36.6 mm
	220 g (with battery)

Product Video




Data Sheet






ExMP32N

Ex-Proof LED Torch

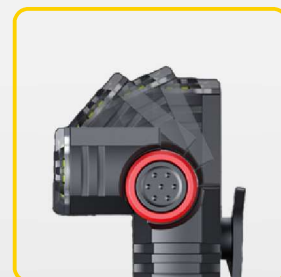

90° rotational head



4 lighting modes:

- Floodlight
- Spotlight
- Dual light
- SOS

Usage	I, II Zone 0/1/2, and III Zone 21/22
	≥200lm (strong mode), ≥80lm (work mode)
	≥9h (strong mode), ≥14h (work mode)
	Up to 80m beam distance
	-40°C≤Ta≤+55°C (T3) / -40°C≤Ta≤+50°C (T4)
	3 × AA Alkaline battery
	IP66/67
	133 × 53 × 37 mm
	220 g (with battery)

Product Video



Data Sheet





ExMP31R

Ex-Proof Rechargeable LED Torch



Exchangeable
Tool free



Dual power supply
module design

Usage	I, II Zone 1/2, and III Zone 21/22
	≥220lm (strong mode), ≥110lm (work mode)
	≥9h (strong mode), ≥13h (work mode)
	Up to 177m beam distance
	-40°C≤Ta≤+55°C
	3.6V, 3350mAh, 18650 lithium battery
	≤5h
	IP66/67
	Φ42 × 49.1 × 162.5 mm
	187 g (with battery)

Product Video



Data Sheet






ExMP31N

Ex-Proof LED Torch



magnet
(optional)

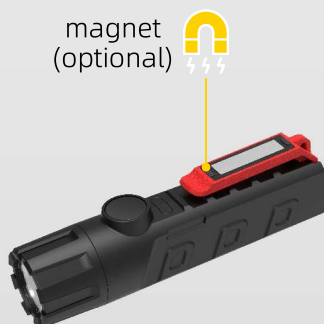

Exchangeable
Tool free



Dual power supply
module design

Usage	I, II Zone 0/1/2, and III Zone 21/22
	≥200lm (strong mode), ≥80lm (work mode)
	≥9h (strong mode), ≥14h (work mode)
	Up to 165m beam distance
	-40°C≤Ta≤+55°C (T3) / -40°C≤Ta≤+50°C (T4)
	3 × AA Alkaline battery
	IP66/67
	Φ42 × 49.1 × 162.5 mm
	195 g (with battery)

Product Video



Data Sheet





ExMP21R

Ex-Proof Rechargeable LED Torch



U shape bracket
Apply to brimless helmet



L shape bracket
Apply to helmet with brim

Usage	I, II Zone 1/2, and III Zone 21/22
	≥130lm (strong mode), ≥80lm (work mode)
	≥12h (strong mode), ≥18h (work mode)
	Up to 94m beam distance
	-40°C≤Ta≤+55°C
	3.6V, 3350mAh, 18650 lithium battery
	≤5h
	IP66/67
	Φ30.5 × 34.6 × 155 mm
	99 g (with battery)

Product Video



Data Sheet





ExMP21N

Ex-Proof LED Torch



U shape bracket
Apply to brimless helmet



L shape bracket
Apply to helmet with brim

Usage	I, II Zone 0/1/2, and III Zone 21/22
	≥80lm
	≥9h
	Up to 64m beam distance
	-40°C≤Ta≤+55°C (T3) / -40°C≤Ta≤+50°C (T4)
	2 × AA Alkaline battery
	IP66/67
	Φ30.5 × 34.6 × 155 mm
	98 g (with battery)

Product Video



Data Sheet



ExMP80R

Ex-proof Mobile Lighting (Area Lights)




115° vertically rotational head



300° horizontally rotational head

Usage	II Zone 1/2, and III Zone 21/22
	-20°C ≤ Ta ≤ +55°C
	IP66/67
	Up to 215m beam distance
	7 Kg (with battery)
	< 7h
	43.2V, 5000mAh, 21700 lithium battery
	5500lm (high), 2500lm (medium), 1500lm (low)
	> 6h (high), > 10h (medium), > 18h (low)
	454×185×260mm(folding) / 800mm(Rising up)

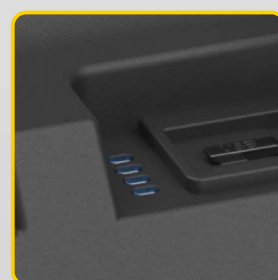

4 grids power display

Data Sheet



ExMP81R

Ex-proof Mobile Lighting (Area Lights)



115° vertically rotational head



300° horizontally rotational head



4 grids power display

Usage	II Zone 1/2, and III Zone 21/22
	-20°C ≤ Ta ≤ +55°C
	IP66/67
	Up to 215m beam distance
	9.8 Kg (with battery)
	< 7h
	43.2V, 5000mAh, 21700 lithium battery
	5500lm (high), 2500lm (medium), 1500lm (low)
	> 6h (high), > 10h (medium), > 18h (low)
	627×157×277mm(folding) / 2150mm(Rising up)

Data Sheet



INMP51R

Industrial Rechargeable Handlamp



90° rotational head



4 optional colors light source, switch by knob.

	≥610lm (strong mode), ≥310lm (work mode)
	≥11h (strong mode), ≥20h (work mode)
	Up to 193m beam distance
	-40°C≤Ta≤+55°C
	7.2V, 6700mAh, 18650 lithium battery
	≤12h
	IP66/67
	WF2 Anti-corrosion
	98.5 × 127 × 228.3 mm
	960 g (with battery)

Product Video




Data Sheet



INMP52R

Industrial Rechargeable Handlamp

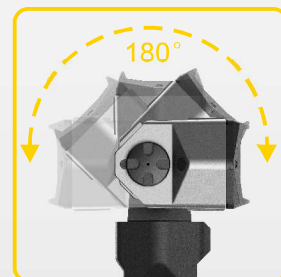

180° rotational head



Position indicator
(color is optional)



	≥500lm (strong mode), ≥230lm (work mode)
	≥11h (strong mode), ≥20h (work mode)
	Up to 181m beam distance
	-40°C≤Ta≤+55°C
	3.6V, 10050mAh, 18650 lithium battery
	≤12h
	IP66/67
	WF2 Anti-corrosion
	193.2 × 92.2 × 105 mm
	610 g (with battery)

Product Video



Data Sheet





INMP61R-1

Industrial Rechargeable Headtorch



108° rotational head



Headband accessory

	≥300lm (strong mode), ≥140lm (work mode)
	≥9h (strong mode), ≥11h (work mode)
	Up to 104m beam distance
	-40°C≤Ta≤+55°C
	3.6V, 3350mAh, 18650 lithium battery
	≤6.5h
	IP66/67
	WF2 Anti-corrosion
	89.2 × 69 × 48 mm
	209 g (with battery)


Product Video

Data Sheet



INMP61R-2

Industrial Rechargeable Headtorch

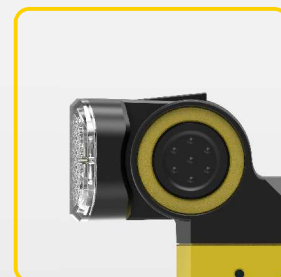

108° rotational head



Headband accessory

	≥300lm (strong mode), ≥140lm (work mode)
	≥14h (strong mode), ≥21h (work mode)
	Up to 104m beam distance
	-40°C≤Ta≤+55°C
	3.6V, 3350mAh, 18650 lithium battery
	≤9h
	IP66/67
	WF2 Anti-corrosion
	89.2 × 69 × 48 mm
	209 g (with battery)

Product Video



Data Sheet



INMP32R

Industrial Rechargeable Right Angle Torch



90° rotational head



4 grids power display

	≥300lm (strong mode), ≥140lm (work mode)
	≥15h (strong mode), ≥23h (work mode)
	Up to 93m beam distance
	-40°C≤Ta≤+55°C
	3.6V, 6700mAh, 18650 lithium battery
	≤9h
	IP66/67
	WF2 Anti-corrosion
	132.5 × 54 × 36.6 mm
	220 g (with battery)

Product Video



Data Sheet




INMP32N

Industrial LED Torch



90° rotational head



4 lighting modes:

- Floodlight
- Spotlight
- Dual light
- SOS

	≥200lm (strong mode), ≥100lm (work mode)
	≥9h (strong mode), ≥11h (work mode)
	Up to 85m beam distance
	-40°C≤Ta≤+55°C
	3 × AA Alkaline battery
	IP66/67
	WF2 Anti-corrosion
	133 × 53 × 37 mm
	220 g (with battery)

Product Video



Data Sheet



INMP31R

Industrial Rechargeable LED Torch



Exchangeable
Tool free



Dual power supply
module design

	≥300lm (strong mode), ≥120lm (work mode)
	≥9h (strong mode), ≥13h (work mode)
	Up to 186m beam distance
	-40°C≤Ta≤+55°C
	3.6V, 3350mAh, 18650 lithium battery
	≤6.5h
	IP66/67
	WF2 Anti-corrosion
	Φ42 × 49.1 × 162.5 mm
	187 g (with battery)

Product Video



Data Sheet





INMP31N

Industrial LED Torch



Exchangeable
Tool free



Dual power supply
module design

	≥200lm (strong mode), ≥100lm (work mode)
	≥9h (strong mode), ≥11h (work mode)
	Up to 174m beam distance
	-40°C≤Ta≤+55°C
	3 × AA Alkaline battery
	IP66/67
	WF2 Anti-corrosion
	Φ42 × 49.1 × 162.5 mm
	195 g (with battery)

Product Video



Data Sheet



INMP21R

Industrial Rechargeable LED Torch



U shape bracket
Apply to brimless helmet



L shape bracket
Apply to helmet with brim

	≥150lm (strong mode), ≥90lm (work mode)
	≥10h (strong mode), ≥17h (work mode)
	Up to 110m beam distance
	-40°C≤Ta≤+55°C
	3.6V, 3350mAh, 18650 lithium battery
	≤6.5h
	IP66/67
	WF2 Anti-corrosion
	Φ30.5 × 34.6 × 155 mm
	99 g (with battery)

Product Video



Data Sheet



INMP21N

Industrial LED Torch



U shape bracket

Apply to brimless helmet



L shape bracket

Apply to helmet with brim

	≥80lm
	≥9h
	Up to 64m beam distance
	-40°C≤Ta≤+55°C
	2 × AA Alkaline battery
	IP66/67
	WF2 Anti-corrosion
	Φ30.5 × 34.6 × 155 mm
	98 g (with battery)

Product Video



Data Sheet



INMP80R

Industrial Mobile Lighting (Area Lights)



Warning light
(6 optional colors)



Dual power supply:
- Mains supply
- Lithium battery

	-20°C≤Ta≤+55°C
	WF2 Anti-corrosion
	IP66/67 (1m, 30min)
	Up to 215m beam distance
	7 Kg (with battery)
	< 7h
	43.2V, 5000mAh, 21700 lithium battery
	5500lm (high), 2500lm (medium), 1500lm (low)
	> 6h (high), > 10h (medium), > 18h (low)
	454×185×260mm(folding) / 800mm(Rising up)



Reverse charge
for torch or phone

Product Video



Data Sheet



INMP81R

Industrial Mobile Lighting (Area Lights)



Warning light
(6 optional colors)



Dual power supply:
- Mains supply
- Lithium battery



Reverse charge
for torch or phone

	-20°C≤Ta≤+55°C
	WF2 Anti-corrosion
	IP66/67 (1m, 30min)
	Up to 215m beam distance
	9.8 Kg (with battery)
	< 7h
	43.2V, 5000mAh, 21700 lithium battery
	5500lm (high), 2500lm (medium), 1500lm (low)
	> 6h (high), > 10h (medium), > 18h (low)
	627×157×277mm(folding) / 2150mm(Rising up)

Data Sheet



INMP82R

Industrial Mobile Lighting (Area Lights)



Warning light
(6 optional colors)



Dual power supply:
- Mains supply
- Lithium battery



Reverse charge
for torch or phone

	-20°C≤Ta≤+55°C
	WF2 Anti-corrosion
	IP65/66 (without speaker)
	Up to 215m beam distance
	20.5 Kg (with battery)
	< 10h
	21.6V, 35000mAh, 21700 lithium battery
	2×5500lm (high), 2×2500lm (low)
	> 8h (high), > 12h (low)
	639×415×255mm(folding) / 2230mm(Rising up)

Product Video



Data Sheet

